
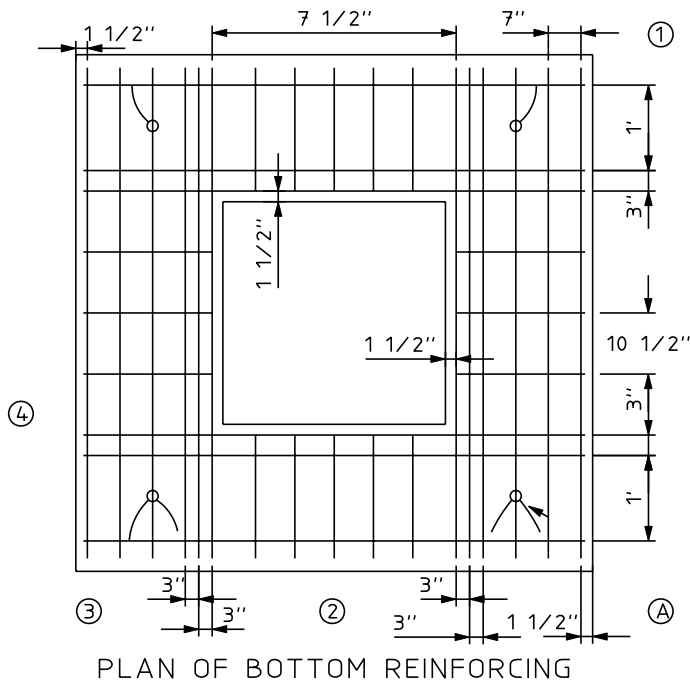
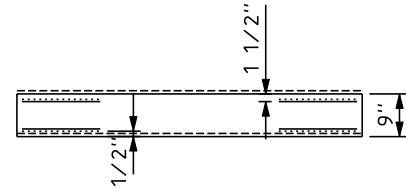


COMPATIBLE UNIT
DESIGNATION

MHRR0608RMY

2-2-1143.1.1

REINFORCING SCHEDULE							
6' X 8' PRECAST ROOF							
LOCATION	9"						
DEPTH	9"						
ROD NO.	1	3	5	7			
QUANTITY	12	10	6	6	8	6	4
SIZE	#6				#3	#3	#3
LENGTH	5'-8"	1'-7"	8'-2"	2'-4"	6'-8"	8'-2"	2'-0"

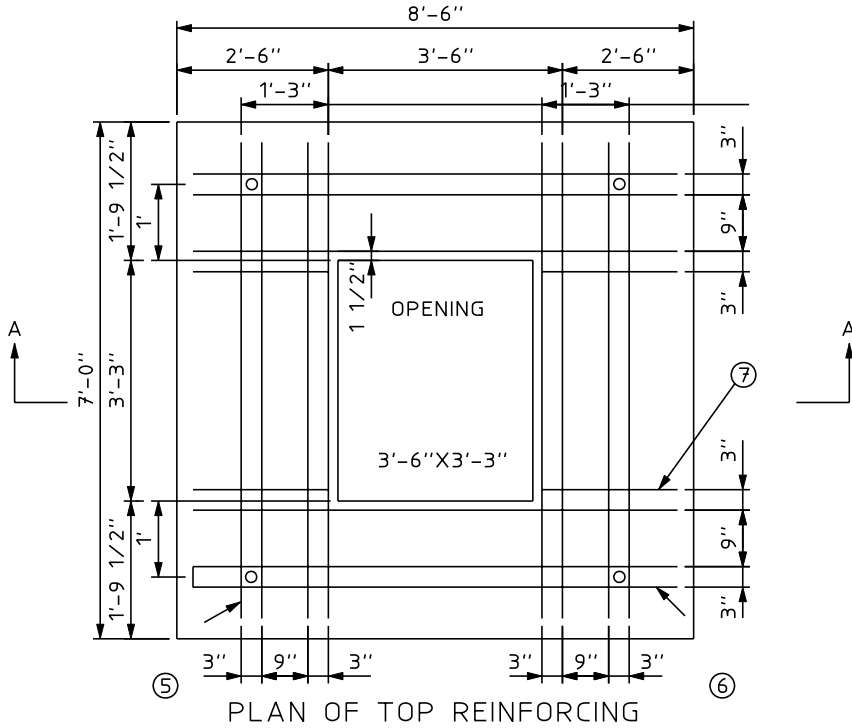

(A) INSTALL SUPERIOR SINGLE PICK-UP INSERTS-TYPE 1,4 REQUIRED.

NOTES:

- TOTAL WEIGHT - 5700 LBS
TOTAL CONCRETE - 1.4 CUBIC YD.
6 BAG MIX, 3500 PSI AT 28 DAYS.
- STOCK # 9721-0565
- ROOF TO BE INSTALL WITH 12" MINIMUM COVER.
- REV A: CHANGED DWG FORMAT;
CHANGED STOCK NO'S PER WMIS.

DRAWN: AIPL DVLPED: CEG DATE: 4/23/79 REVIEWED: IDY DATE: 10/2/08 APPRVD: MDW DATE: 10/9/08 NEXT REVIEW: 11/11 REV: A



POWER
DISTRIBUTION
STANDARDS

PRECAST ROADWAY ROOF FOR
6'-0" X 8'-0" MANHOLE