
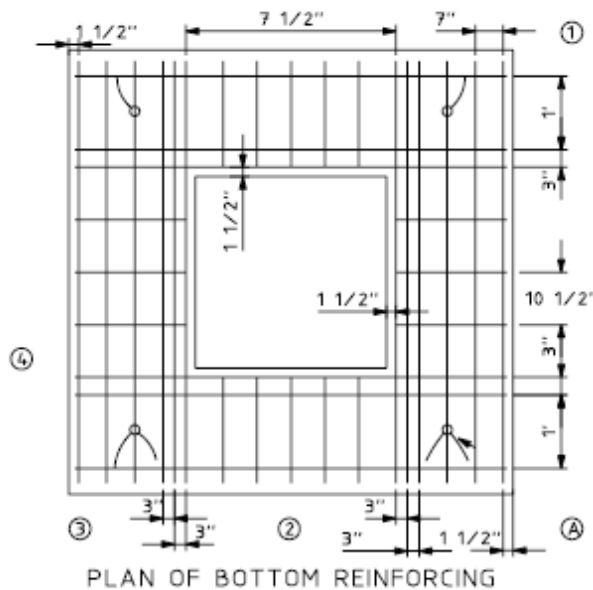


COMPATIBLE UNIT
DESIGNATION
MHRR0608RMY

1143.1.1

REINFORCING SCHEDULE							
6' X 8' PRECAST ROOF							
LOCATION	9"						
DEPTH	9"						
ROD NO.	1	3	5	6	7		
QUANTITY	12	10	6	6	8	6	4
SIZE	#6	#6	#6	#3	#3	#3	#3
LENGTH	5'-8"	1'-7"	8'-2"	2'-4"	6'-8"	8'-2"	2'-0"

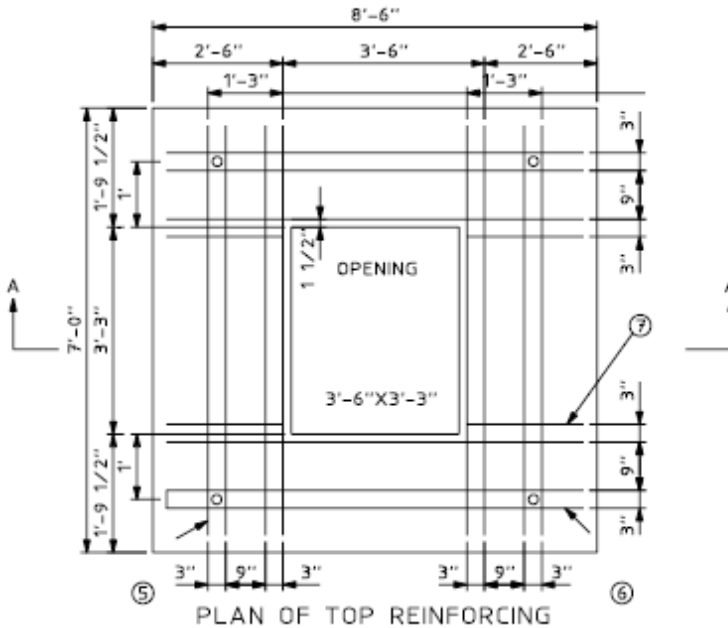

NOTES:

- TOTAL WEIGHT - 5700 LBS
TOTAL CONCRETE - 1.4 CUBIC YD.
6 BAG MIX, 3500 PSI AT 28 DAYS.
- STOCK # 9721-0565
- ROOF TO BE INSTALL WITH
12" MINIMUM COVER.
- REV A: CHANGED DWG FORMAT;
CHANGED STOCK NO'S PER WMIS.

(A) INSTALL SUPERIOR SINGLE PICK-UP
INSERTS-TYPE 1,4 REQUIRED.

DRAWN: AIPL DVLPED: CEG DATE: 4/23/79 REVIEWED: RDS DATE: 10/08/15 APPRVD: AAT DATE: 10/08/15 NEXT REVIEW: 10/19 REV: A



POWER
DISTRIBUTION
STANDARDS

PRECAST ROADWAY ROOF FOR
6'-0" X 8'-0" MANHOLE